
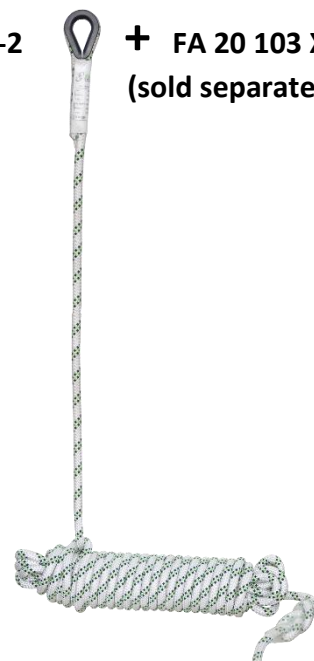




EN 353-2


+ FA 20 103 XX  
(sold separately)

EN 353-2

MAXI 200 KG  
(rescue only)

EN 12841

+



+

FA 70 011 99 (lg./m) / FA 70 000 98  
(sold separately)

## HS CODE

84798997

## CARTON SIZE / PCS.

43 x 43 x 8 cm / 20

AET N°2777/10860-03/E02-01

**Satra Technology Europe Ltd., N° 2777,**  
 Bracetown Business Park, Clonee,  
 Dublin, D15YN2P, Ireland

MODULE D FI14/14003.01


**SGS Fimko Oy, N°0598**  
 Takomotie 8,  
 00380 HELSINKI, Finland

AET (UKCA) N°AB0321/16010-01/E01-01

**Satra Technology Centre, N°0321**  
 Wyndham Way, Telford Way, Kettering  
 Northamptonshire, NN16 8SD, United Kingdom


MODULE D 11 IN14/14003

**SGS United Kingdom Ltd., N°0120**  
 Unit 202B, Worle Parkway,  
 Weston-super-Mare, BS22 6WA, United Kingdom


|                                                                                                |                                                                                                                                         |
|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| REF.                                                                                           | FA 20 103 00A                                                                                                                           |
| LG.<br><br>KG | ---                                                                                                                                     |
| CE                                                                                             | EN 353-2:2002, EN 12841:2006                                                                                                            |
| MAT.                                                                                           |                                                        |
|               | YES                                                                                                                                     |
|              |                                                       |
| R(kN)                                                                                          | 15 kN                                                                                                                                   |
| +                                                                                              | (1) EN 353-2 : MAX. 200 KG (rescue only)<br>(2) FA 20 103 10 / FA 20 103 15 / FA 20 103 20 / FA 20 103 30 / FA 20 103 40 / FA 20 103 50 |
|             | 0.35 KG                                                                                                                                 |



**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers



**Matière connecteur**  
 Material of connector  
**Material conector**  
 Materiale connettore  
**Material des Verbinders**



**Coulisseau doté d'un point fixe**  
 Rope grab with a fixed point lock  
**Corredera provista de punto fijo**  
 Guida a punto fisso  
**Gleitelement mit Festpunkt**

+

(1)

**Point fort**  
 Key feature  
**Ventaja principal**  
 Punti forti  
**Produktvorteil**

+

(2)

**À utiliser avec**  
 To be used with  
**Para usar con**  
 Ad essere utilizzato con  
**Verwendet werden soll mit**